



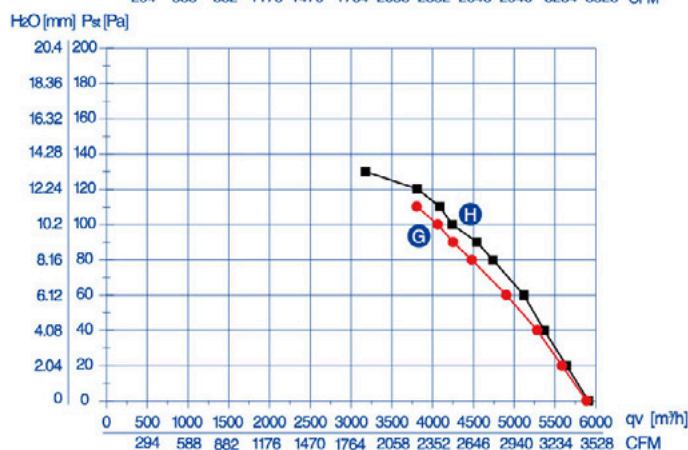

工作方式: S1  
绝缘等级: B、F  
防护等级: IP44、IP54  
环境温度: -30℃~60℃  
认证: CCC、CE、UL  
能效指标: 符合ErP2015

Mode of operation: S1  
Insulation class: B、F  
Type of protection: IP44、IP54  
Ambient temperature: -30℃~60℃  
Certificates: CCC、CE、UL  
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线	备注
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.	NOTE.
	V	Hz	A	W	r/min	m³/h	μF	dBA	kg		a b c
YWF4E-450S-102/60	220	50	1.15	250	1350	5365	8	69	8.0	(A)	60 70 102
	120	60	2.55	300	1600	5770	32	69	8.0	(B)	60 70 102
YWF6E-450S-102/60	220	50	0.75	138	920	3775	6	61	8.0	(C)	60 70 102
	120	60	1.52	180	1050	4375	20	61	8.0	(D)	60 70 102
YWF4D-450S-102/60	380	50	0.55	250	1350	5415	/	69	8.0	(E)	60 70 102
YWF6D-450S-102/60	380	50	0.40	150	900	4270	/	61	8.0	(F)	60 70 102
YWF4E-450S-137/35	220	50	1.70	370	1360	5890	10	70	8.5	(G)	35 58 137
YWF4D-450S-137/35	380	50	0.77	370	1360	5910	/	70	8.5	(H)	35 58 137

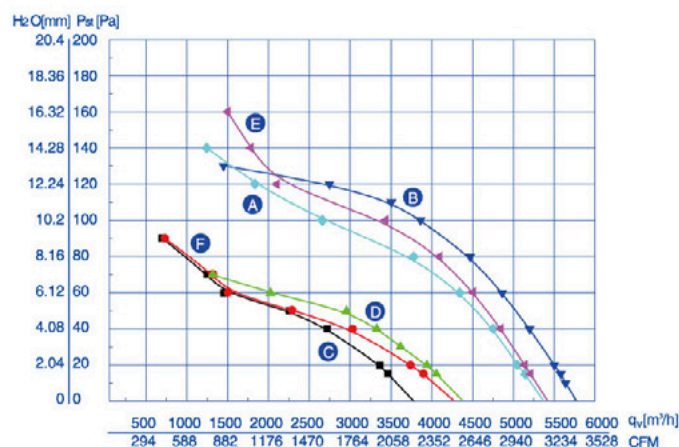

性能数据  
Performance data

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
(A)	20	1350	245	1.11	5050
	40	1335	264	1.19	4750
	60	1320	272	1.23	4340
(B)	20	1595	333	2.88	5500
	40	1565	347	2.97	5195
	60	1550	360	3.04	4860
(C)	20	930	150	0.68	3365
	40	915	155	0.71	2720
	60	900	162	0.74	1450
(D)	20	1065	168	1.48	3940
	40	1030	179	1.58	3325
	60	960	197	1.75	2025
(E)	20	1370	240	0.52	5140
	40	1355	250	0.54	4845
	60	1345	268	0.56	4505
(F)	20	905	148	0.40	3740
	40	890	158	0.40	3030
	60	870	173	0.41	1505
(G)	20	1385	295	1.35	5585
	60	1370	320	1.47	4900
	80	1360	333	1.53	4480
(H)	20	1380	303	0.69	5640
	60	1360	337	0.72	5120
	80	1350	350	0.74	4740